# Led driver control
## Interface for DALI drivers

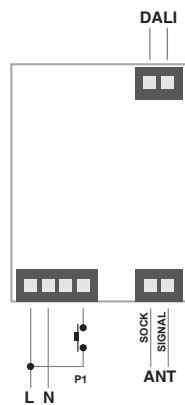| | | | | | | | |
|---|---|---|---|---|---|---|---|
| 230 V input | DALI Output | On-Off | Dimmer | Wired | Radio RF | App WiFi | Voice |

## TOP-DL20/ONE

Command interface for driver control with DALI input (Max 20 devices, broadcast command). 230Vac power supply. Radio receiver 433.92MHz. One wired input. Integrated WiFi module for remote control by App OneSmart and voice command.

**DALI**

P1

**SOCK**
**SIGNAL**

L  N

**ANT**

| | |
|---|---|
| Code | TOP-DL20/ONE |
| Power supply | 110-240 Vac |
| Output | Broadcast DALI signal |
| Function | Dimmer |
| Programmable parameters | Timer On, Last intensity value memory |
| Max DALI drivers | 20 |
| Input | 1 NO Push button |
| No. Programmable transmitters | 30 |
| Radio frequency | 433.920 MHz ISM |
| Wireless Smart | WiFi 2,4GHz |
| Smart reote control | App OneSmart |
| Voice commands | Google Home, Alexa Amazon |
| Protection rating | IP20 |
| Working temperature | -20 +55 °C |
| Dimensions | 174x46x35 mm |

## TOP LINEA

Compact size, ideal for use in false ceilings and interconnection boxes

Thick, robust technopolymer casing

42

SET    A    B    a    b

Covered screw fixings

Two-digit programming display with buttons and LED warning lights. Protective cover.

Screw connectors, cable gland and protective cover