

Universal control unit for constant voltage LEDs 12-24 Vdc



11:22

Light 3 CCT


 $(\mathbf{1})$ 

Schedule

Left time

NEXTA

## CONSTANT VOLTAGE LED CONTROL

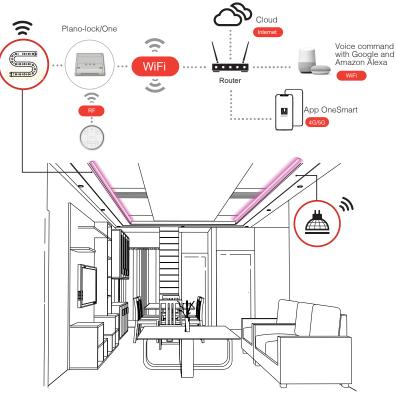



### 4 COMMAND MODES

Plano-One allows constant voltage LED control via: 1. wired button thanks to the dry contact input

- 2. radio controls and wireless sensors,
- radio controls and wireless sensors,
  Smartphone with iOS and Android OneSmart App

4. Voice command thanks to compatibility withGoogle Home and Alexa Amazon voice assistants



#### APP FOR ANDROID AND IOS

The OneSmart App can be downloaded for free from Google Play and Apple stores. Easy to configure, allows the control of the Plano-One via smartphone and tablet.

#### **REMOTE CONTROL**

Thanks to the Wi-Fi connection through the Cloud, it's possible to remotely control the LEDs connected to the Plano-One.

#### SCENARIOS AND HOURLY PROGRAMMING

In addition to the dimming command, the OneSmart App allows you to easily create scenarios and hourly-weekly switch-on shutdown schedules.




## DIMMER-RGB-RGBW-CCT PLANO-ONE

Universal control unit for constant voltage LEDs 12-24Vdc, selectable software:

- 1. Single color dimmer (4 synchronized outputs Max 5A/out, Max total 4 outs 10A),
- 2. CCT tunable white (1 out warm white Max 5A, 1 cold white Max 5A),
- 3. RGB (3 outs Max 5A/out, Max total 3 outs 8A),
- 4. RGBW (4 outs Max 5A/outs, Max total 10A).

4 command modes: 1. wires push button (1 input),2. Radio RF, 3. Remote control Wi-Fi with App iOS and Android, 4. Voice command copatible with Google Home and Alexa Amazon





12-24 Vdc

#### TECHNICAL DATA

Code	PLANO-ONE
Power supply	12-24Vdc
Output	x Led 12-24 Vdc Max power / output: 5A (60W with 12V, 120W with 24V) Max total power: 10A (120W with 12V, 240W with 24V)
Selectable function	Mode 1: Dimmer Mode 2: W=50%CW + 50%WW Mode 3: W=100%CW + 100%WW Mode 4: RGB Mode 5: RGBW (W=W) Mode 6: RGBW (W=W+RGB)
Input	1 NO push button
No. Programmable transmitters	30
Radio frequency	433.920 MHz ISM
Smart wireless	WIFI 2,4GHz
Smart control	App OneSmart
Vocal control	Google Home, Alexa Amazon
Protection rating	IP20
Working temperature	-20 + 55°C
Dimensions	80x80x16 mm

12-24 Vdc

## 4 DIMMER OUTPUTS PLANO-ONE/4

Universal control unit for constant voltage LEDs 12-24Vdc, selectable software for the management of one to four LED outputs. 4 command modes: 1. wired push button (1 input), 2. Radio RF, 3. Remote control Wi-Fi with App iOS and Android, 4. Voice command compatible with Google Home and Alexa Amazon.

Q

12-24 Vdc

12-24 Vdc

3 channels





----

ed 1 ed 2 ed 2 ed 2



- + 12-24 Vdc



+ P1	+ Led 1,2
	- +
	12-24 Vdc



TECHNICAL	DATA

Code	PLANO-ONE/4
Power supply	12-24Vdc
Output	4 x Led 12-24 Vdc Max power / output: 5A (60W with 12V, 120W with 24V) Max total power: 10A (120W with 12V, 240W with 24V)
Selectable function	Mode 1: 1 channels Mode 2: 2 channels Mode 3: 3 channels Mode 4: 4 channels
Input	1 NO push button
No. Programmable transmitters	30
Radio frequency	433.920 MHz ISM
Smart wireless	WIFI 2,4GHz
Smart control	App OneSmart
Vocal control	Google Home, Alexa Amazon
Protection rating	IP20
Working temperature	-20 + 55°C
Dimensions	80x80x16 mm

**SMA**RT WIFI





# LED KIT

Smart wireless kit for LED lights 12-24Vdc. Composed by one control unit with WiFi and RF receivers, designed for controlling single color, RGB, RGBW or Tunable white CCT LED lights with maximum power 240W (24Vdc on 4 outputs). Wireless command with one pocket-size portable or wall remote control (KIT-ONE-TOUCH version) or with one cutting edge design remote control with magnetic wall support (KIT-ONE-DESIGN version). Smart remote control from wherever you are by App OneSmart and voice commands compatible with Google Home and Amazon Alexa. Easy set up of scenarios for centralized commands and hourly and weekly programs.

III

WIRELESS RF CONTROL

0

NEXTA

 $(\mathbf{b})$ 

(++)

1

(1)

